

PSR-OR700 Installation Procedure

Caution: Do not turn off the power or remove the USB flash memory during this operation.

Confirming the version number

- 1) Turn on the power of the instrument and wait until the main display appears.
- 2) Press the [FUNCTION] button, then select [UTILITY] → [OWNER] tab.
- 3) Press the [7▲] or [8▲] button.
- 4) Check the version number to proceed with the upgrade.

☆ version 1.04 or earlier ; Go on to [step1](#).

☆ version 1.05 or later ; Skip step1-3 and Go on to [stepA](#).



Boot Program Installation

1 Downloading the boot program

- 1) Download the Zip file.
- 2) Extract the two files included in the Zip file.
- 3) Insert the USB flash memory into your computer.
- 4) Copy the extracted files into the root directory of the USB flash memory.

2 Connecting the USB flash memory

Insert the USB flash memory containing the appropriate program to the USB TO DEVICE terminal on the instrument.



Caution: Make sure that the USB flash memory is connected properly to the terminal.

Do not try to force an incorrect connection; doing so may damage the terminal.


3 Installing the boot program

Simultaneously hold down the [PLAY/STOP] button on the panel and turn on the power. Keep holding down the [PLAY/STOP] button until the following display is shown.

Note : Please confirm that the System Booter shown as 『ver.1.00』 .

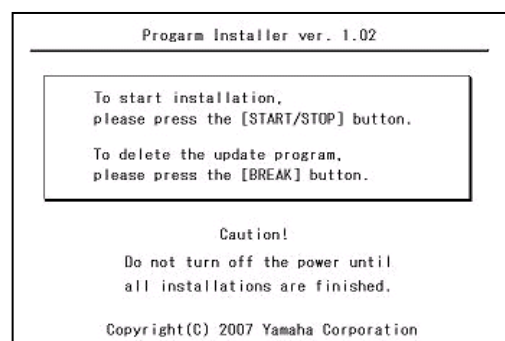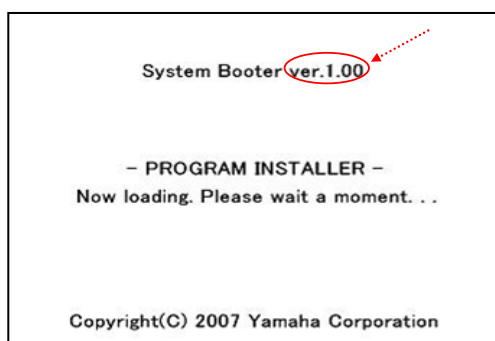


Press the [PLAY/STOP] button twice to start installation.

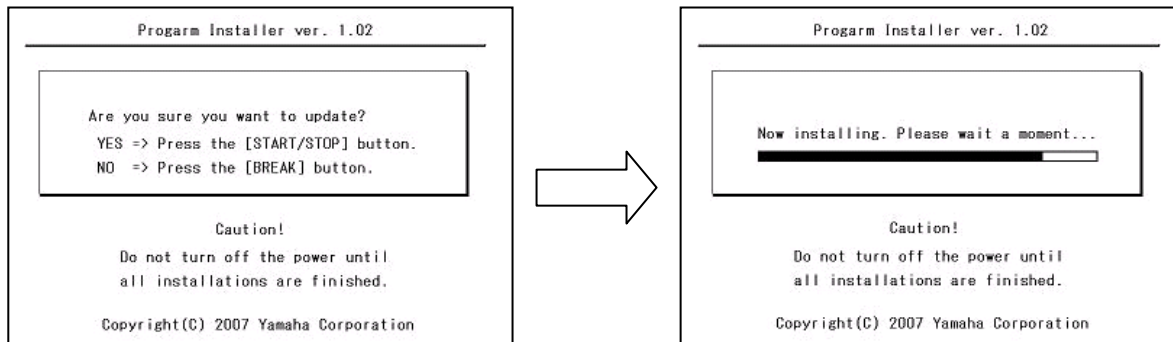

* When the installation is completed, the following display appears.

Turn off the power switch on the instrument, and go on to [step A](#).

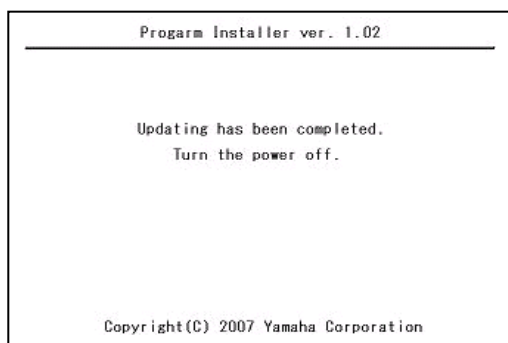

Firmware Installation

A

Downloading the firmware

- 1) Download the Zip file.
- 2) Extract the six files included in the Zip file.
- 3) Insert the USB flash memory into your computer.
- 4) Copy the extracted files into the root directory of the USB flash memory.

B

Connecting the USB flash memory

Insert the USB flash memory containing the appropriate program to the USB TO DEVICE terminal on the instrument.

Caution: Make sure that the USB flash memory is connected properly to the terminal.


Do not try to force an incorrect connection; doing so may damage the terminal

C


Installing the firmware

Simultaneously hold down the [PLAY/STOP] button on the panel and turn on the power.
Keep holding down the [PLAY/STOP] button until the following display is shown.

Note : Please confirm that the System Booter shown as 『ver.1.01』 .

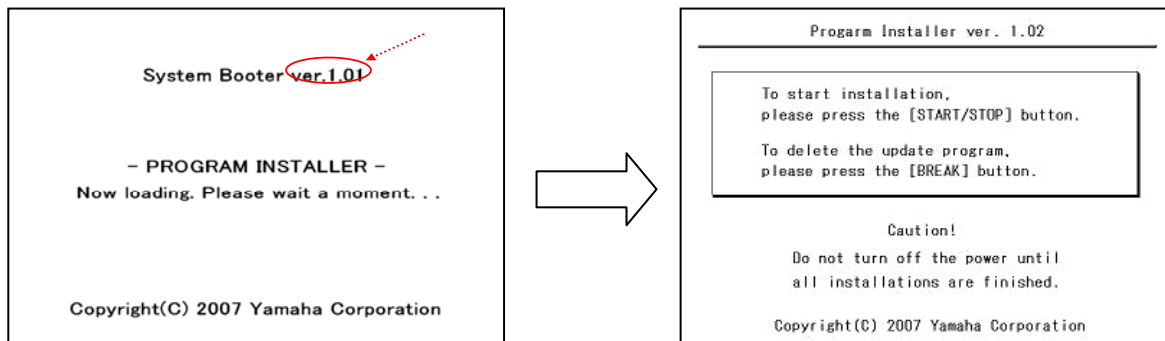


Press the [PLAY/STOP] button twice to start installation.

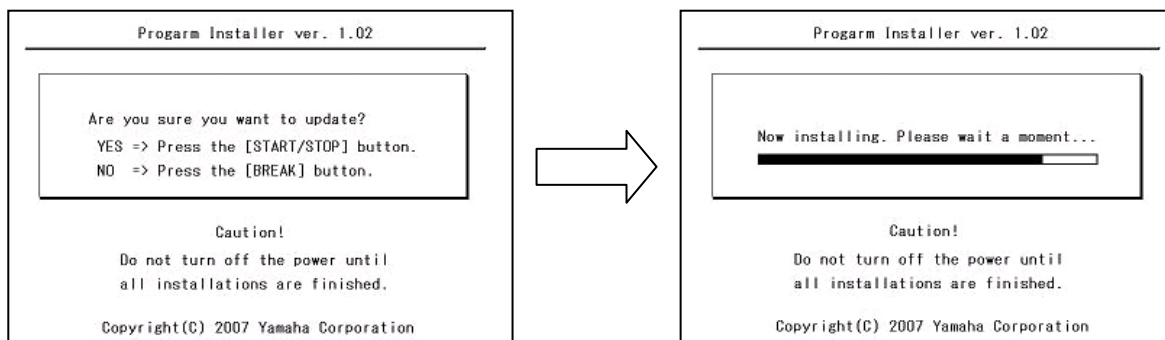

* When the installation is completed, the following display appears.

Turn off the power switch on the instrument.

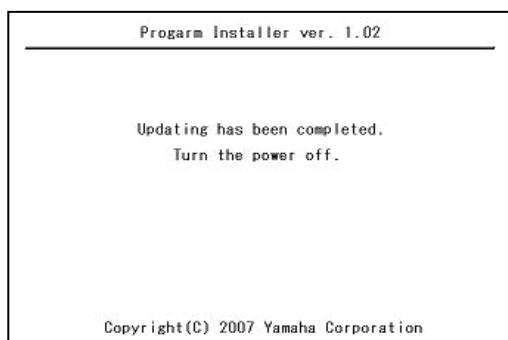

Troubleshooting

- ☆ The power supply was cut off or the USB flash memory was removed during operation.
 - A complete reinstall is necessary. Perform the operation again from the beginning.

- ☆ The installation cannot be executed and an error message appears in the display.

Check the following:

- ✓ Is the USB flash memory inserted correctly?
- ✓ Is the USB connector free from dust or dirt?
- ✓ Is the USB flash memory or the upgrade data itself damaged in some way?

Try installing it again by using another USB flash memory.